


## How to choose a BEBICON Compressor

- ① Select Compressor type according to your requirement.
- ② Select necessary pressure and air capacity.  
As a reference, necessary pressure should be 0.2MPa higher than the working pressure in need, and necessary air capacity should be 10 to 20% more than the one in need. (Air capacity indicated in this catalogue is valued at maximum discharge pressure and converted at its inlet condition)  
Select rated output based on the selected pressure and capacity.
- ③ Confirm the details of power source (Voltage/Phase/Frequency)
- ④ Confirm if there is any regulation on noise control.

Note: Make sure to confirm the frequency of power source when placing an order. Please notice that oil may emulsify in case of over-intermittent operation for oil-lubricated type. The above is for your reference. For specific model selection, contact your nearest dealer or Hitachi local representative office.

### ■ Selecting Procedure

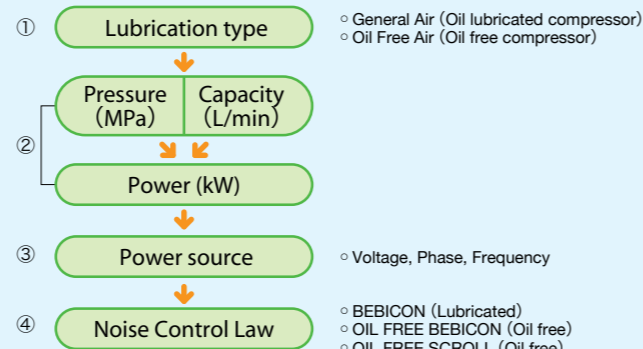

## BEBICON OIL

Hitachi BEBICON OIL is high-performance oil which is specially developed for BEBICON compressors. To maximise Energy-Saving effects, prevent performance degradation and protect BEBICON compressors from trouble or breakdown, it is necessary to use Hitachi genuine BEBICON OIL as the ONLY lubricating oil during maintenance.

### Genuine Parts


Hitachi genuine parts must be used when maintaining a Hitachi BEBICON compressor, to keep your compressor from trouble or breakdown.



## Features: Oil-Free Air Compressors

### High Cooling Head

**High Cooling Head** with large aluminium alloy ventilated rib improves heat radiation and air capacity. In addition, **V-groove** located between discharge and suction chamber reduces the heat transfer from **discharge chamber** to **suction chamber** and improves air capacity.

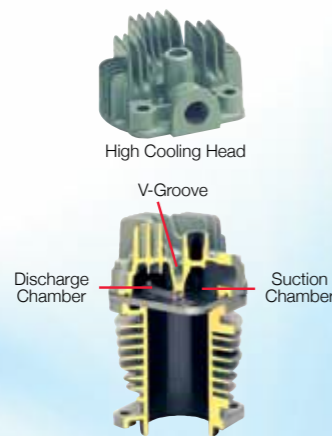

### Lead Air Valve


**Lead Air Valve** of I-shaped stainless steel on suction side improves air capacity and improves durability against rusting.



### Heat Cut Piston Pin & Leak Cut Piston Ring

**Heat Cut Piston Pin** of heat-insulating material reduces heat transfer from the **piston** to the **needle bearing** and keeps bearing at a relatively low temperature, improving the reliability.

**Leak Cut Piston Ring** of specially shaped abutment joint reduces air leakage and improves air capacity.

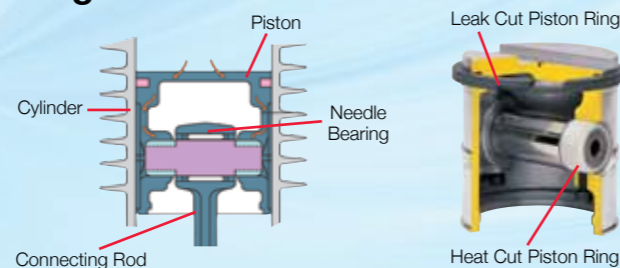

# HITACHI BEBICON COMPRESSORS

PISTON TYPE  
Oil-free & Oil-lubricated Air Compressors

**HITACHI**  
Inspire the Next

# BEBICON®

Innovation, Performance and Reliability




### Hitachi Australia Pty Ltd

Level 8, 123 Epping Road, Macquarie Park NSW 2113  
Locked Bag 2052, North Ryde NSW 2113  
TEL: +61 (2) 9888-4100 FAX: +61 (2) 9888-4188  
Email: compressors@hitachi.com.au  
Website: [www.hitachi.com.au/products/business/power/atg.dhtml](http://www.hitachi.com.au/products/business/power/atg.dhtml)

For further information please contact your nearest sales representative.





# BEBICON Air Compressors (0.75-11kW)

High Performance

High Reliability


Compact & Light

Easy to Maintain



2.2P - 9.5VSL/H5 A

- ASIA/Australia
- Frequency (50Hz)
- Horizontal Tank
- Large Tank (Option)
- Single Phase
- New V Series
- Pressure (0.93MPa [9.5kgf/cm<sup>2</sup>])
- Pressure Switch type
- Motor Output (2.2kW)



# Oil-free Air Compressors (0.4-11kW)

High Performance

Durable Design

Long Overhaul Cycle

Oil-Free Air



3.70P - 9.5G5A

- ASIA/Australia
- Frequency (50Hz)
- GREEN Series
- Pressure (0.93MPa [9.5kgf/cm<sup>2</sup>])
- Pressure Switch Type
- Oil Free
- Motor Output (3.7kW)



## Specifications (HORIZONTAL & VERTICAL TANK MOUNT TYPE)

Tank Type	Operation System	Motor Output kW	Model	Maximum Pressure MPa (PSIG)	Compressor Speed min <sup>-1</sup>	Displacement L/min (CFM)	Capacity at Maximum Pressure L/min (CFM)	Air tank Capacity L	Power Source PH	Standard Accessories	External Dimensions Width x Depth x Height mm	Weight Kg
Horizontal	Pressure-switch type	0.75	0.75P-9.5VS 5A	0.93 (135)	990	126 (4.5)	80 (2.8)	62	1PH	Pressure gauge, Safety valve, Hose joint, V-Belt, Belt cover, Silencer, Stop valve  Air outlet 1/4Bx1 for 0.75, 1.5 kW & 2.2 kW, 3/8Bx1 for 3.7 & 5.5 kW, 3/4Bx1 for 7.5 & 11kW	931x376x804	80
			3PH						75			
		1.5	1.5P-9.5VS 5A		970	257 (9.1)	165 (5.8)	80	1PH		1,173x418x855	96
			3PH						1,173x380x855		85	
		2.2	2.2P-9.5VS 5A		730	386 (13.6)	265 (9.4)	90	1PH		1,283x434x860	147
			3PH						1,283x403x860		126	
		3.7	3.7P-9.5V 5A		1,000	541 (19.1)	440 (15.5)	125	3PH		1,345x428x923	160
			3PH						1,470x482x932		202	
		5.5	5.5P-9.5V5A		1,080	795 (28.1)	630 (22.2)	150	3PH		1,470x482x932	202
			3PH						1,674x556x1,094		255	
7.5	7.5P-9.5V5A	950	1,027 (36.3)	840 (29.7)	235	3PH	1,674x556x1,094	255				
	3PH					1,793x611x1,098	326					
11	11P-9.5V5A	1,050	1,546 (54.6)	1,200 (42.4)	260	3PH	1,793x611x1,098	326				
	3PH					1,793x611x1,098	326					
Horizontal	Pressure-switch type	3.7	3.7P-14VH5A	1.37 (199)	900	487 (17.2)	400 (14.1)	230	3PH	Pressure gauge, Safety valve, Hose joint, V-Belt, Belt cover, Silencer, Stop valve	1,624x525x1007	223
			3PH						1,624x566x1,015		262	
			3PH						1,624x590x1,090		295	
Vertical	Pressure-switch type	3.7	3.7P-12.5(14)V5A	1.23 / 1.37 (178 / 199)	900	487 (17.2)	400 (14.1)	300	3PH	Air Outlet 3/8Bx1 for 3.7 & 5.5kW, 3/4Bx1 for 7.5kW	957x590x1,732	420
			3PH						1,025x611x1,734		450	
			3PH						1,102x634x1,814		480	

- Use the Compressor at a place where ambient temperature is 0 (at which there is no freeze of drain water) to 40°C.
- The capacity of compressed air is the amount of air discharged under the maximum pressure converted in terms of air suction (atmospheric pressure, ambient temperature 20°C, humidity 60%).
- Hitachi compressors are not designed, intended or approved for breathing air applications.
- Motors start with full voltage.
- Large tank option available for 0.75 - 3.7kW (0.93MPa) models.

## Specifications (HORIZONTAL TANK MOUNT TYPE)

Operation Systems	Motor Output kW	Model	Maximum Pressure MPa (PSIG)	Compressor Speed min <sup>-1</sup>	Displacement L/min (CFM)	Capacity at Maximum Pressure L/min (CFM)	Air tank Capacity L	Power Source PH	Standard Accessories	External Dimensions Width x Depth x Height mm	Weight kG
Pressure-switch type	0.75	0.750P-9.5GS5A	0.93 (135)	980	139 (4.9)	75 (2.6)	80	1PH	Pressure gauge, Safety valve, Hose joint, V-Belt, Belt cover, Silencer, Stop valve  Air outlet 1/4Bx1 for 0.75 & 1.5 kW & 2.2kW, 3/8Bx1 for 3.7 & 5.5 kW, 3/4Bx1 for 7.5 & 11 kW	1,173 x 380 x 852	90
		3PH						85			
	1.5	1.50P-9.5GS5A		880	278 (9.8)	165 (5.8)	80	1PH		1,173 x 431 x 897	121
		3PH						1,173 x 393 x 897		110	
	2.2	2.20P-9.5GS5A		650	412 (14.5)	240 (8.5)	90	1PH		1,283 x 434 x 825	150
		3PH						1,283 x 403 x 825		129	
	3.7	3.70P-9.5GS5A		850	646 (22.8)	405 (14.3)	125	3PH		1,345 x 423 x 913	158
		3PH						1,470 x 482 x 995		201	
	5.5	5.50P-9.5GS5A		860	981 (34.6)	605 (21.3)	150	3PH		1,470 x 482 x 995	201
		3PH						1,674 x 552 x 1,045		282	
7.5	7.50P-8.5GA5A	915	1,347 (47.6)	880 (31.1)	235	3PH	1,674 x 552 x 1,045	282			
	3PH					2,014 x 646 x 1,153	400				
11	110P-8.5GA5A	900	1,987 (70.2)	1,285 (45.4)	290	3PH	2,014 x 646 x 1,153	400			
	3PH					2,014 x 646 x 1,153	400				

- Use the compressor at a place where ambient temperature is 0 (at which there is no freeze of drain water) to 40°C.
- The capacity of compressed air is the amount of air discharged under the maximum pressure converted in terms of air suction (atmospheric pressure, ambient temperature 20°C, humidity 60%).
- Hitachi air compressors are not designed, intended or approved for breathing air applications.
- Motors start with full voltage.

## Super Oil-Free BEBICON LE Series



Motor Output kW (50Hz)	Model	Compressor				Air Tank Capacity (L)	External Dimensions Width x Depth x Height (mm)	Motor	Weight (kg)
		Max. Pressure MPa (PSIG)	Control Pressure ON-OFF (MPa)	Rotating Speed (min <sup>-1</sup> )	Capacity (L/min)				
0.4	0.4LE-8S-5A	0.8 (116)	0.6 - 0.8	50 Hz	42	20	600x322x608	230V 1PH	30
				1360					

- Use the compressor at a place where ambient temperature is 0 (at which there is no freeze of drain water) to 40°C.
- The capacity of compressed air is the amount of air discharged under the maximum pressure converted in terms of air suction (atmospheric pressure, ambient temperature 20°C, humidity 60%).
- Hitachi air compressors are not designed, intended or approved for breathing air applications.
- Supplied with Pressure Gauge, Safety Valve and Stop Valve.